


## DataSpec DS Decorative Static-Control Coating System

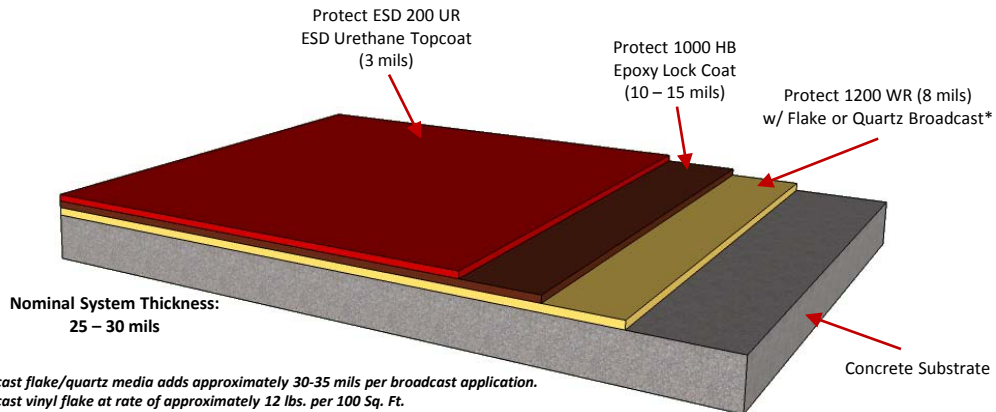

\* Broadcast flake/quartz media adds approximately 30-35 mils per broadcast application.

\* Broadcast vinyl flake at rate of approximately 12 lbs. per 100 Sq. Ft.

\* Broadcast colored quartz at rate of approximately .75 lbs. per 1 Sq. Ft.

### System Description:

A decorative static-control coating system utilizing an epoxy primer that is broadcast with decorative quartz or vinyl flake media. The system is lock-coated with a high-build epoxy, then topcoated with a high-performance ESD-control urethane. This aesthetically-pleasing system provides a highly-elevated image while offering all the benefits of a static-control system. Areas of use include aiseways, conference rooms, restrooms and break rooms.

### System Advantages:

- Particulate technology maintains ESD properties throughout entire ESD coating thickness
- Aesthetically-pleasing image
- Monolithic and seamless
- Damage resistant, yet easy to clean
- Available in Static Dissipative or Conductive ranges (special order for conductive)
- Complies with all ANSI S20.20 revisions
- Exceeds ESD STM 97.1/97.2 requirements
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate
2. Broadcast decorative media\* into wet primer and allow to cure
3. Apply Protect 1000 HB lock coat and allow to cure
4. Apply Protect 200 ESD UR and allow to cure



All DataSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.