




DealerSpec™ DS Decorative System

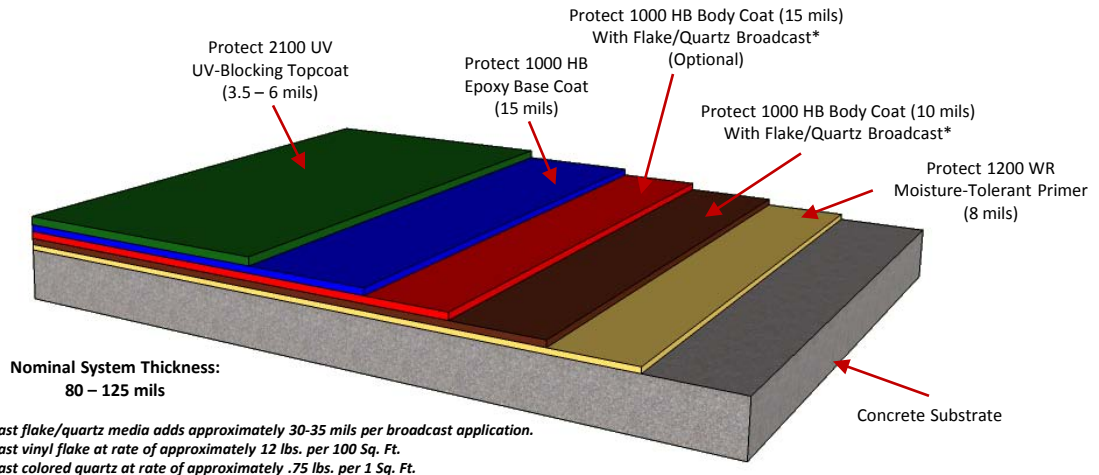

System Description:

A polymer-based decorative system consisting of a moisture-tolerant primer, epoxy basecoat(s) with vinyl flake or colored quartz broadcast into the wet epoxy, top coated with a high-performance UV-blocking urethane. This system produces a decorative, easy-to-clean surface that is ideal for showrooms, write-up areas and restrooms where functionality, safety and aesthetics are important.

System Advantages:

- Wide array of decorative quartz and flake color combinations
- Very low-odor
- Excellent chemical-resistance
- Enhanced aesthetics
- Ideal for showrooms, restrooms and waiting areas

System Installation Overview:

1. Apply Protect 1200 WR primer and allow to cure
2. Apply Protect 1000 HB with flake or quartz broadcast*, allow to cure
3. Apply Protect 1000 HB with flake or quartz broadcast*, allow to cure (Optional)
4. Apply Protect 1000 HB sealer coat over broadcast layer and allow to cure
5. Apply Protect 2100 UV topcoat and allow to cure



All DealerSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.