


DecoSpec ChromaFlake SB

Decorative Vinyl Flake Single Broadcast System

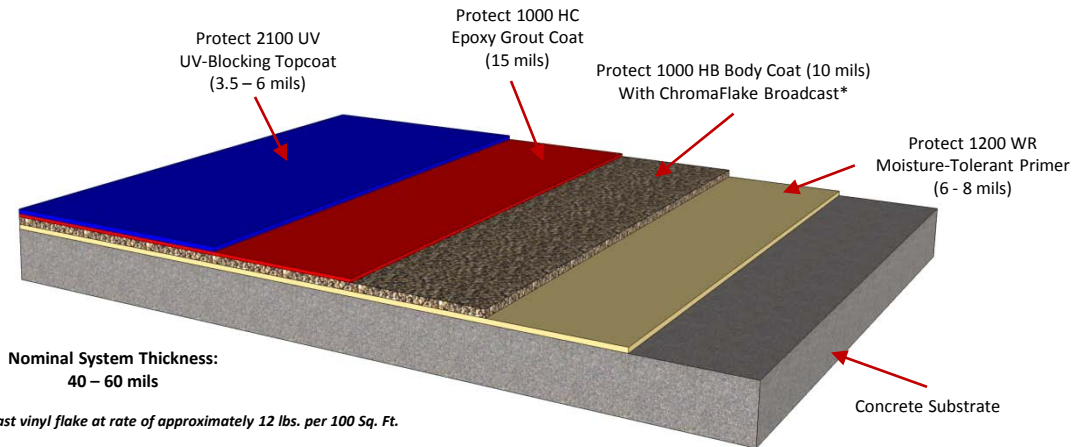

System Description:

A polymer-based decorative system consisting of a moisture-tolerant primer, followed by a high-build epoxy basecoat with vinyl flakes broadcast into the wet epoxy. The system is grout coated with a high-clarity epoxy and top coated with a high-performance UV-blocking urethane. This system produces a decorative, chemical-resistant, easy-to-clean surface that is ideal for showrooms, locker rooms, lobbies, cafeterias and restrooms where functionality, safety and aesthetics are important.

System Advantages:

- Wide array of flake color and blend combinations (See DecoSpec Decorative Media Guide)
- Very low-odor
- Excellent chemical-resistance
- Enhanced aesthetics

System Installation Overview:

1. Apply Protect 1200 WR primer and allow to cure
2. Apply Protect 1000 HB with ChromaFlake broadcast*, allow to cure
3. Apply Protect 1000 HC sealer coat over broadcast layer and allow to cure
4. Apply Protect 2100 UV topcoat and allow to cure



All DecoSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.