


DecoSpec LusterFlake DB Decorative Mica Flake Double Broadcast System

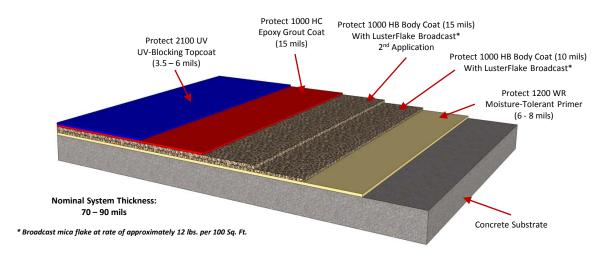

System Description:

A polymer-based decorative system consisting of a moisture-tolerant primer, followed by two applications of a high-build epoxy basecoat with mica flakes broadcast into the wet epoxy. The system is grout coated with a high-clarity epoxy and top coated with a high-performance UV-blocking urethane. This system produces a decorative, chemical-resistant, easy-to-clean surface that is ideal for showrooms, locker rooms, lobbies, cafeterias and restrooms where functionality, safety and aesthetics are important. Double broadcast decorative systems are well-suited for restoration/rehab projects where the concrete may have experienced moderate use.

System Advantages:

- Wide array of flake color and blend combinations (See DecoSpec Decorative Media Guide)
- Very low-odor
- Excellent chemical-resistance
- Enhanced aesthetics
- Suited for restoration/rehab projects

System Installation Overview:

- 1. Apply Protect 1200 WR primer and allow to cure
- 2. Apply Protect 1000 HB with LusterFlake broadcast*, allow to cure
- 3. 2nd Application of Protect 1000 HB with LusterFlake broadcast*, allow to cure
- 4. Apply Protect 1000 HC sealer coat over broadcast layers and allow to cure
- 5. Apply Protect 2100 UV topcoat and allow to cure



All DecoSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.

