




Proline SR-FGR-L

Enhanced Chemical and Solvent-Resistant Fiberglass Reinforced Lining System

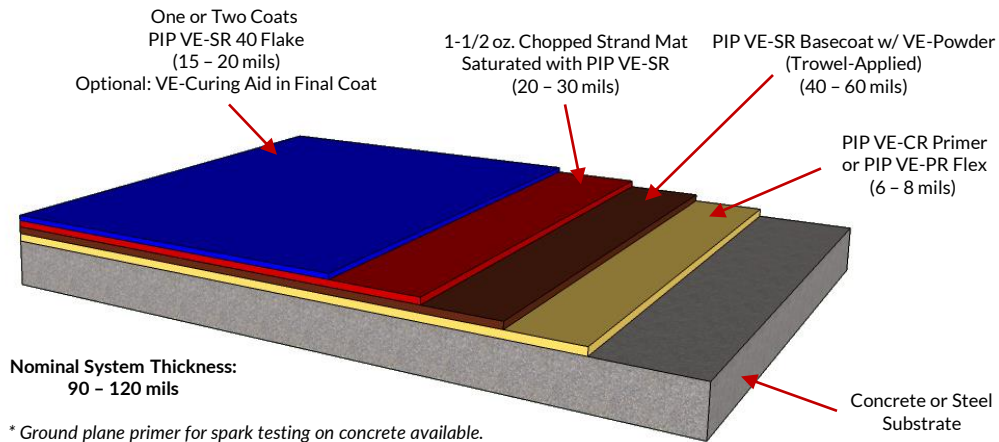

System Description:

This system consists of a vinyl ester primer, followed by vinyl ester troweled basecoat that is reinforced with fiberglass mat and saturated with a vinyl ester resin. The system is then top-coated with one or two applications of a flake-filled vinyl ester coating. This system exhibits excellent chemical, wear, impact and abrasion resistance.

System Advantages:

- Withstands high temperatures
- Handles intermittent spills up to 140°F (60°C)
- Reinforced flake topcoat
- Excellent permeation resistance
- Superior solvent and chemical resistance
- Excellent wear characteristics
- Available in variety of colors for finish coats

System Installation Overview:

1. Apply PIP VE-CR or VE-PR Flex primer and allow to cure
2. Apply PIP VE-SR basecoat with VE-Powder and allow to cure
3. Place fiberglass mat into wet basecoat and saturate with PIP VE-SR, allow to cure
4. Apply one or two topcoats PIP VE-SR 40 Flake (Optional : VE-Curing Aid in final coat)