


Protect **BC-500pro** High-Performance Broadcast Flooring System Texture: T222*

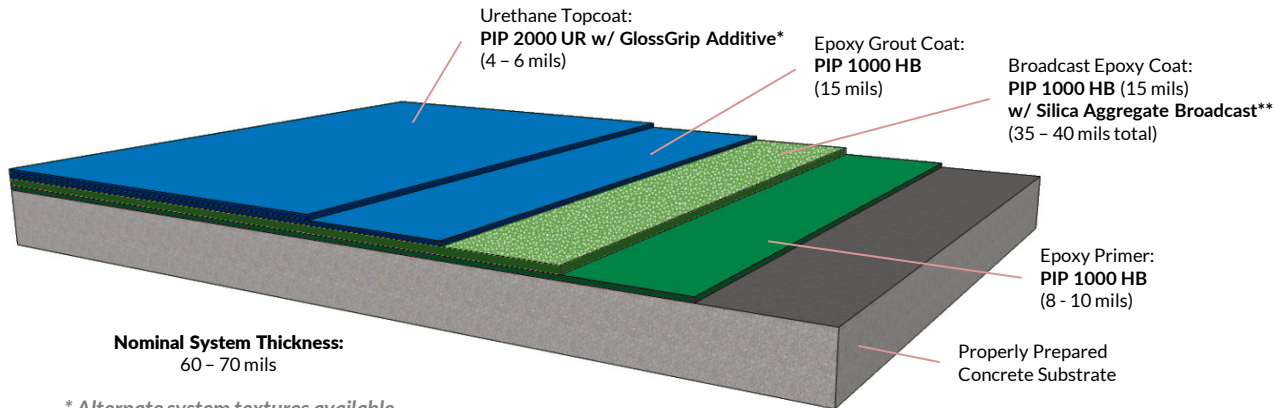

* Alternate system textures available

** Broadcast silica aggregate media adds approximately 20-25 mils per broadcast application.

** Broadcast silica aggregate at rate of approximately 0.5 to 0.75 lbs. per 1 Sq. Ft.

System Description:

A broadcast floor system consisting of an epoxy primer, followed by a high-build epoxy broadcast with silica aggregate. The system is then coated with a high-build epoxy, and top coated with an aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This low-odor broadcast system can be pigmented in a variety of colors, and features excellent impact and abrasion resistance. Suited for use in general shop areas where aesthetics and cleanability are a requirement.

System Advantages:

- Extremely low odor
- High-build application
- Excellent impact and abrasion resistance
- Resists staining from general cleaning chemicals
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP 1000 HB epoxy primer to properly prepared substrate and allow to cure
2. Apply PIP 1000 HB body coat, broadcast with silica aggregate and allow to cure
3. Apply PIP 1000 HB epoxy and allow to cure
4. Apply PIP 2000 UR urethane with high-wear additive and allow to cure