


# Protect **BC-900xtreme**

## Extreme-Wear Broadcast Flooring System

### Texture: T191

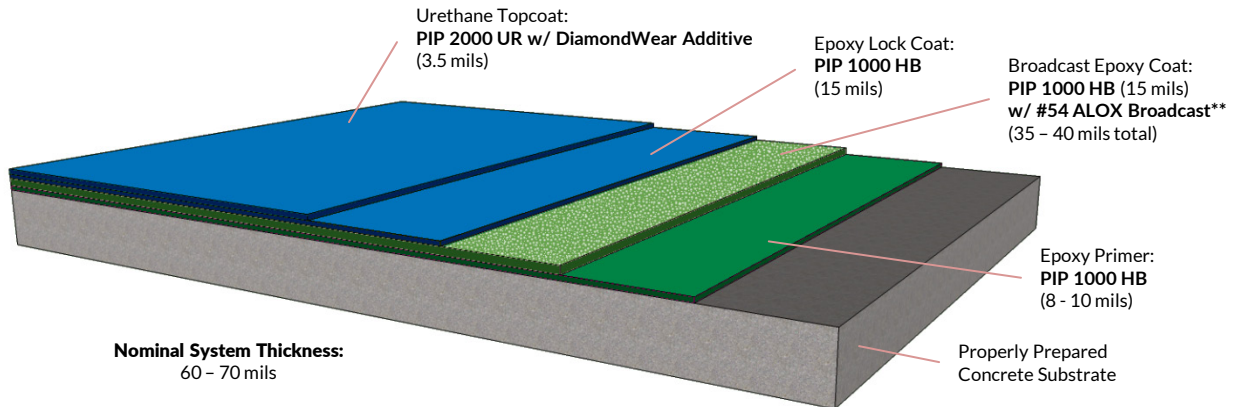

\*\* Broadcast ALOX #54 media adds approximately 20-25 mils per broadcast application.

\*\* Broadcast ALOX #54 media at rate of approximately .75 to 1.0 lbs. per 1 Sq. Ft.

### System Description:

A broadcast floor system consisting of an epoxy primer, followed by a high-build epoxy broadcast with aluminum oxide aggregate. The system is then coated with a high-build epoxy, and top coated with an aliphatic urethane enhanced with a DiamondWear additive. This extreme wearing broadcast system is suited for shop areas exposed to heavy wheel and foot traffic, such as aiseways and warehouse areas. This system exhibits a satin, textured finish and can be pigmented in a vast array of colors.

### System Advantages:

- Light-reflective satin textured finish
- Resists dulling of surface
- Up to 300% greater wear than standard epoxy
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

### System Installation Overview:

1. Apply PIP 1000 HB epoxy primer to properly prepared substrate and allow to cure
2. Apply PIP 1000 HB body coat, broadcast with Aluminum Oxide and allow to cure
3. Apply PIP 1000 HB epoxy and allow to cure
4. Apply PIP 2000 UR urethane with DiamondWear additive and allow to cure