




## Protect CT-400fast

### Fast-Cure Floor Coating System

### Texture: T51

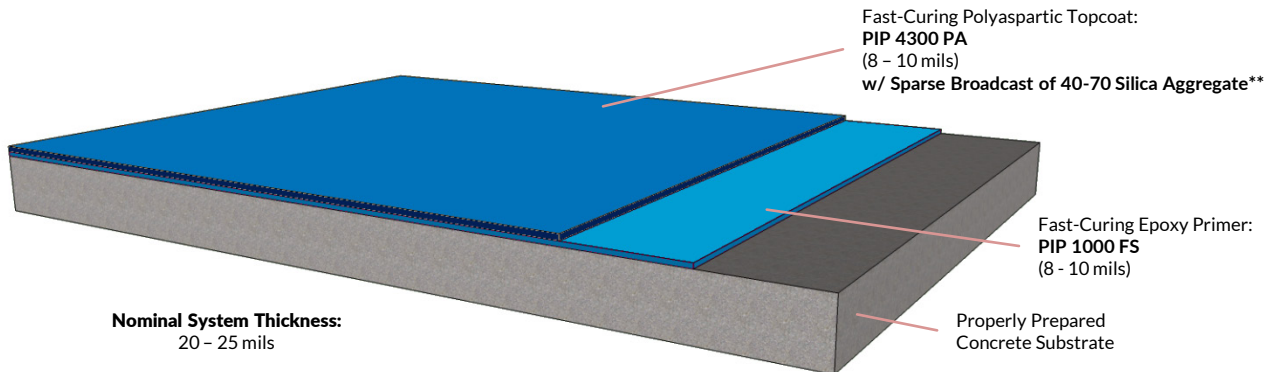

\*\* Broadcast 40-70 silica aggregate at rate of approximately 1 lb. per 100 Sq. Ft.

#### System Description:

This system consists of a fast-curing epoxy primer followed by a fast-curing polyaspartic topcoat with a sparse broadcast of silica aggregate. This easy-to-clean, light-reflective, UV-resistant system is ideal for general use areas exposed to general traffic. This system is suited for areas with minimal shutdown windows where quick return to service is a requirement.

#### System Advantages:

- Very low odor
- Quick turnaround for minimal shutdown windows
- UV-resistant
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors
- USDA-compliant

#### System Installation Overview:

1. Apply PIP 1000 FS to properly prepared substrate and allow to cure
2. Apply PIP 4300 PA polyaspartic topcoat and allow to cure