




# Protect **CT-500pro**

## High-Performance Floor Coating System

### Texture: T22\*

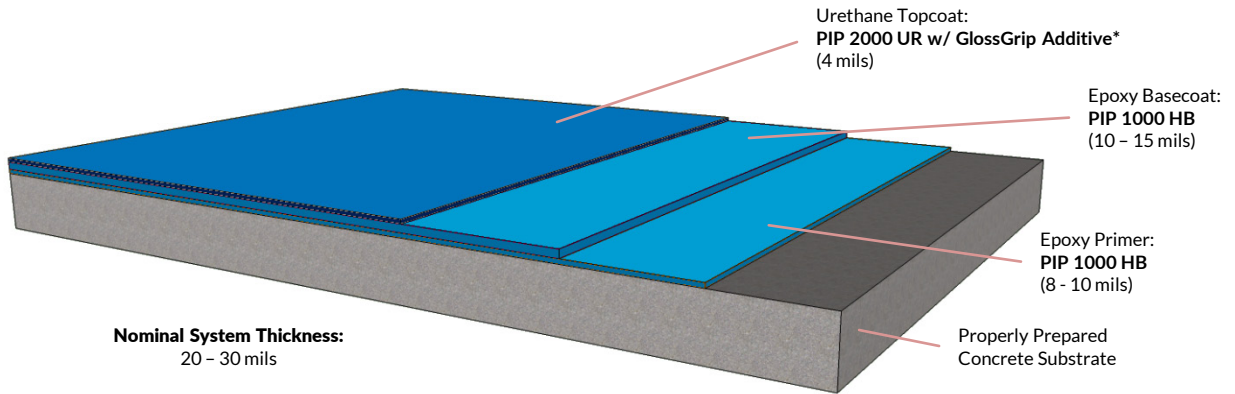

\* Alternate system textures available

### System Description:

This system consists of an epoxy primer, followed by a high-build epoxy basecoat. The system then receives a topcoat of aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This low-odor coating system can be pigmented in a variety of colors, and features excellent impact and abrasion resistance. Suited for use in general traffic areas where aesthetics and cleanability are a requirement.

### System Advantages:

- Extremely low odor
- High-build application
- Excellent impact and abrasion resistance
- Resists staining from general cleaning chemicals
- Available in a wide array of colors

### System Installation Overview:

1. Apply PIP 1000 HB epoxy primer to properly prepared substrate and allow to cure
2. Apply PIP 1000 HB epoxy basecoat and allow to cure
3. Apply PIP 2000 UR topcoat with GlossGrip additive and allow to cure