




Protect CT-800flex

Flexible Floor Coating System

Texture: T22*

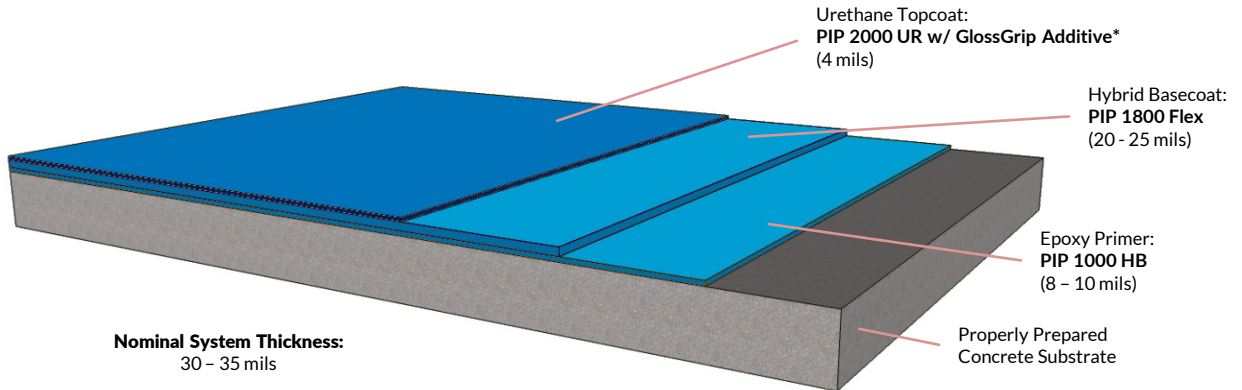

* Alternate system textures available

System Description:

This flexible coating system consists of an epoxy primer, followed by a highly-flexible epoxy/urethane hybrid membrane coating. The system is top coated with an aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This system is suited for liquid processing and elevated areas where a flexible membrane system is required.

System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Better impact resistance than standard epoxy systems
- Excellent gloss retention
- Easy-to-clean
- Flexible, moderate modulus

System Installation Overview:

1. Apply PIP 1000 HB primer to properly prepared substrate and allow to cure
2. Apply PIP 1800 Flex and allow to cure
3. Apply PIP 2000 UR urethane with high-wear additive and allow to cure