




Protect **CT-900xtreme** Extreme-Wear Floor Coating System Texture: T21

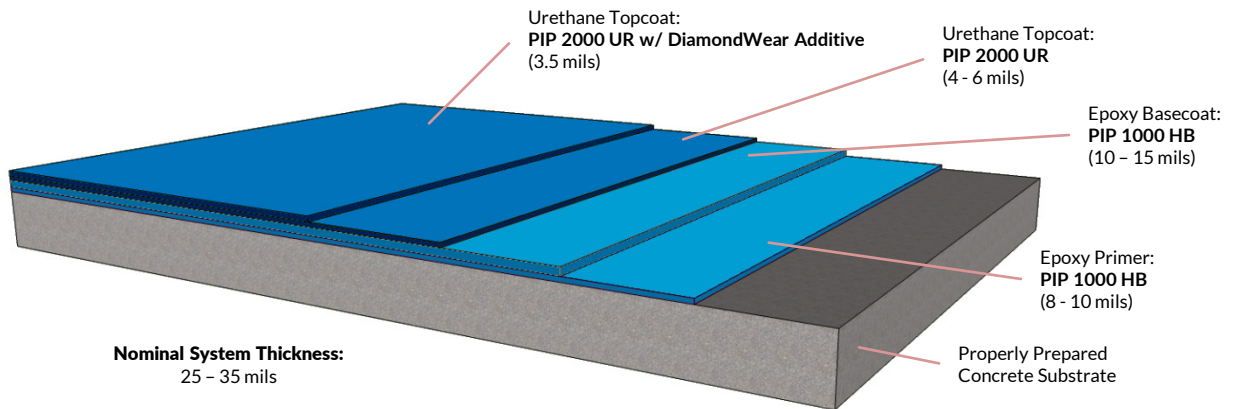

System Description:

This system consists of an epoxy primer, followed by a high-build epoxy basecoat. The system then receives a coat of an aliphatic urethane and a topcoat of aliphatic urethane enhanced with DiamondWear high-wear additive. This extreme wearing coating system is suited for areas exposed to heavy wheel and foot traffic, such as aisleways and warehouse areas. This system exhibits a high-wearing satin finish and can be pigmented in a vast array of colors.

System Advantages:

- Light-reflective satin texture
- Resists dulling of surface
- Up to 300% greater wear than standard epoxy
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP 1000 HB epoxy primer to properly prepared substrate and allow to cure
2. Apply PIP 1000 HB epoxy basecoat coat and allow to cure
3. Apply PIP 2000 UR urethane coat and allow to cure
4. Apply PIP 2000 UR topcoat with DiamondWear additive and allow to cure