


Protect MT-800flex

Flexible Mortar Flooring System

Texture: T22*

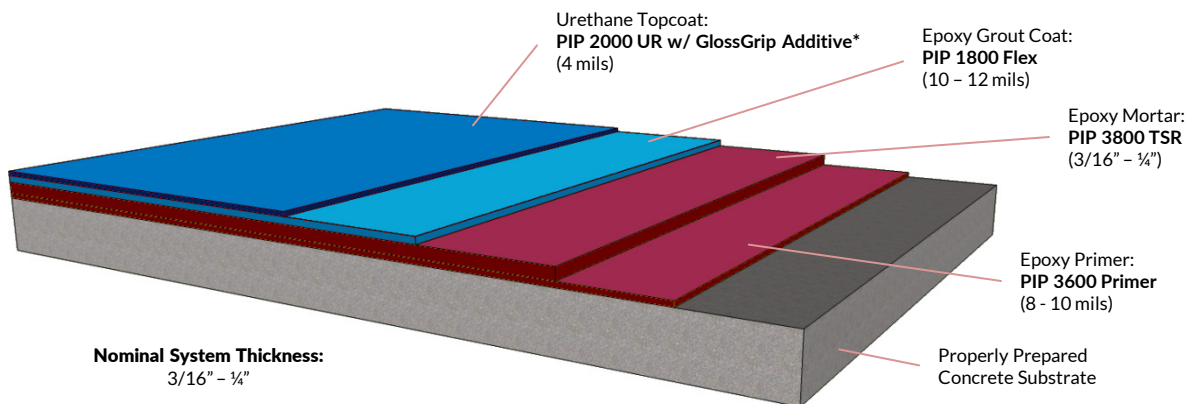

** Alternate system textures available*

System Description:

A heavy-duty, flexible mortar system consisting of an epoxy primer followed by an application of a resilient epoxy mortar. The system is then coated with a flexible epoxy/urethane hybrid coating and top coated with an aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This mortar system will resurface badly damaged concrete to a new, more durable surface, and is suited for MEP, interstitial floors, liquid processing and elevated areas requiring a very resilient flooring overlay.

System Advantages:

- Very durable
- very good chemical resistance
- Resurfaces damaged concrete substrates
- Very good impact and abrasion resistance
- flexible system for unique applications
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP 3600 Primer to properly prepared substrate and allow to cure
2. Apply PIP 3800 TSR epoxy mortar system and allow to cure
3. Apply PIP 1800 Flex flexible epoxy system and allow to cure
4. Apply PIP 2000 UR urethane with GlossGrip additive and allow to cure