


Protect **SL-400fast**

Fast-Cure Slurry Flooring System

Texture: T100

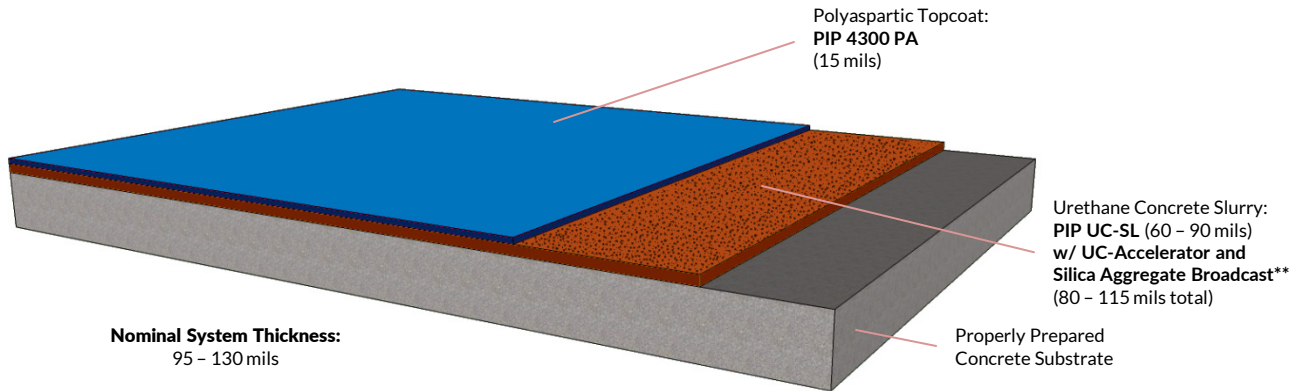

** Broadcast silica aggregate media adds approximately 20-25 mils per broadcast application.

** Broadcast silica aggregate at rate of approximately 0.75 to 1.0 lbs. per 1 Sq. Ft.

System Description:

A slurry flooring system consisting of an accelerated-cure urethane concrete broadcast with silica aggregate, top coated with a fast-curing polyaspartic topcoat. This system is ideal for areas exposed to general foot and wheeled traffic. This system is suited for areas with minimal shutdown windows where quick return to service is a requirement.

System Advantages:

- Quick turnaround for minimal shutdown windows
- Very low odor
- UV-resistant
- Restores old or damaged concrete
- Improved moisture tolerance
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP UC-SL with UC Accelerator and silica aggregate broadcast to properly prepared substrate and allow to cure
2. Apply PIP 4300 PA topcoat and allow to cure