


SL Series

SLURRY FLOORING SYSTEMS



Protect **SL-500pro** High-Performance Slurry Flooring System Texture: T22*

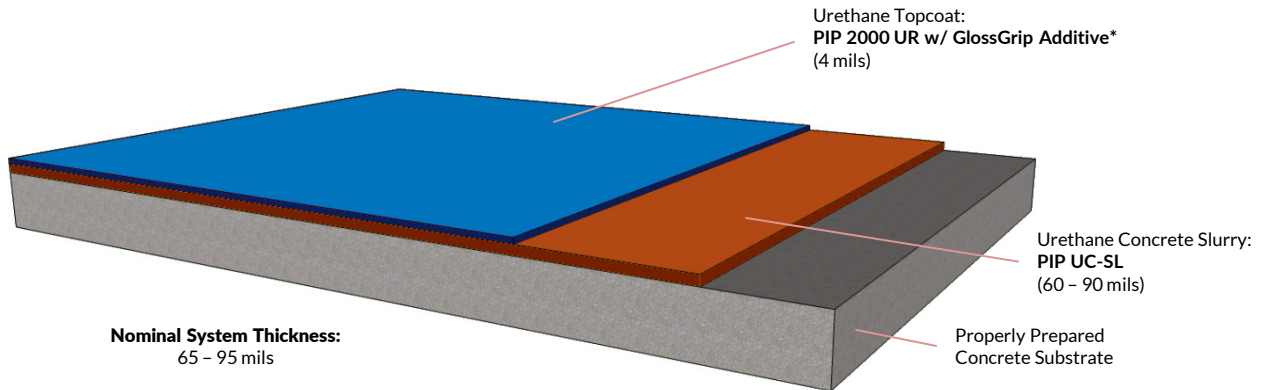

* Alternate system textures available

System Description:

A slurry flooring system consisting of a urethane concrete slurry coating top coated with an aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This system features good thermal-shock, chemical and abrasion resistance. Suited for use in areas where the concrete slab is worn or slightly damaged.

System Advantages:

- Extremely low odor
- Good thermal-shock, chemical and abrasion resistance
- Improved moisture tolerance
- Restores old or damaged concrete
- Resists staining from general cleaning chemicals

System Installation Overview:

1. Apply PIP UC-SL urethane concrete to properly prepared substrate and allow to cure
2. Apply PIP 2000 UR topcoat with GlossGrip additive and allow to cure



800-974-1323
info@protectpoly.com
www.protectpoly.com