


SL Series

SLURRY FLOORING SYSTEMS



Protect **SL-800flex** Flexible Slurry Flooring System Texture: T222*

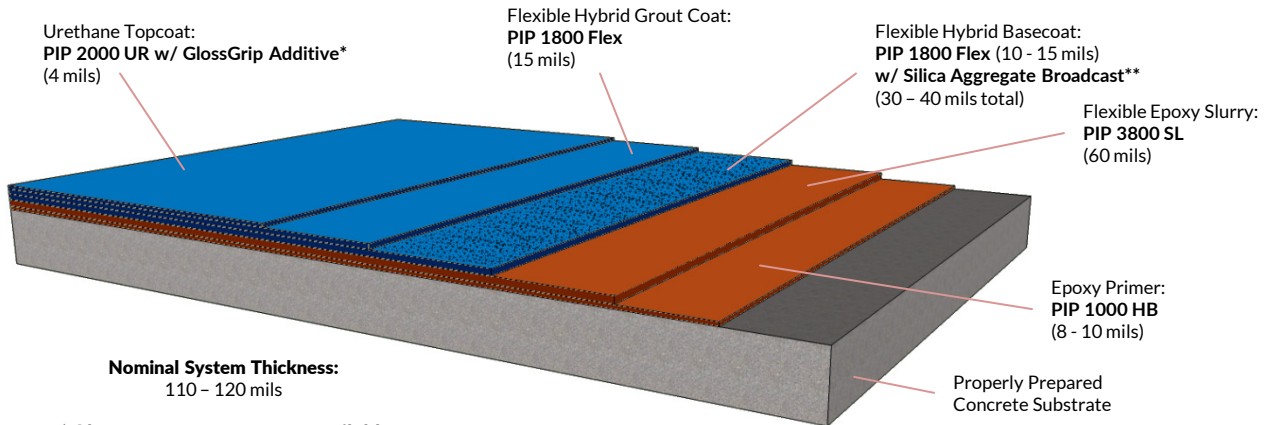

* Alternate system textures available

** Broadcast silica aggregate media adds approximately 20-25 mils per broadcast application.

** Broadcast silica aggregate at rate of approximately 0.75 to 1.0 lbs. per 1 Sq. Ft.

System Description:

A flexible slurry flooring system consisting of an epoxy primer followed by a flexible epoxy slurry. A flexible hybrid polymer basecoat is broadcasted with silica aggregate, and then grout coated with a flexible hybrid polymer. The system is then top coated with an aliphatic urethane enhanced with GlossGrip Safety, Gloss and Wear Additive. This floor system is ideal for areas of high impact where tools or heavy items are frequently dropped on the floor.

System Advantages:

- Quick turnaround for minimal shutdown windows
- Impact-resistant
- Restores old or damaged concrete
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

System Installation Overview:

1. Apply PIP 100 HB epoxy primer and allow to cure
2. Apply PIP 3800 SL flexible epoxy slurry and allow to cure
3. Apply PIP 1800 Flex flexible basecoat broadcast with silica aggregate and allow to cure
4. Apply PIP 1800 Flex flexible grout coat and allow to cure
5. Apply PIP 2000 UR topcoat with GlossGrip additive and allow to cure



800-974-1323
info@protectpoly.com
www.protectpoly.com