


Protect **SL-900xtreme** Extreme-Wear Slurry Flooring System Texture: T191

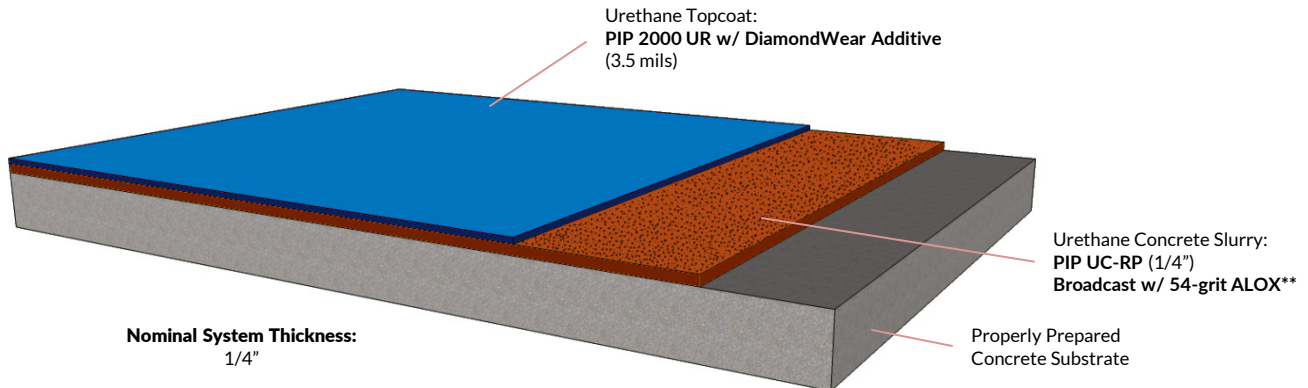

** Broadcast 54-grit ALOX aggregate adds approximately 20-25 mils per broadcast application.

** Broadcast silica aggregate at rate of approximately 1 to 1.25 lbs. per 1 Sq. Ft.

System Description:

A slurry flooring system consisting of a urethane concrete slurry base broadcasted with aluminum oxide. The system is top coated with an aliphatic urethane enhanced with DiamondWear additive. This extreme wearing slurry system works well in constant wet areas where slip-resistance is a requirement. This system exhibits an extremely abrasion-resistant, heavily textured surface and can be pigmented in a vast array of colors.

System Advantages:

- Extremely low odor
- Excellent abrasion resistance
- Improved moisture tolerance
- Restores old or damaged concrete
- Longer service life
- Lower maintenance costs
- Available in a wide array of UV-stable colors

System Installation Overview:

1. Apply PIP UC-RP urethane concrete broadcast with ALOX, allow to cure
2. Apply Protect 2000 UR urethane topcoat with DiamondWear additive, allow to cure