


TruckSpec BC-pro

High-Performance Broadcast Flooring System

Texture: Variable*

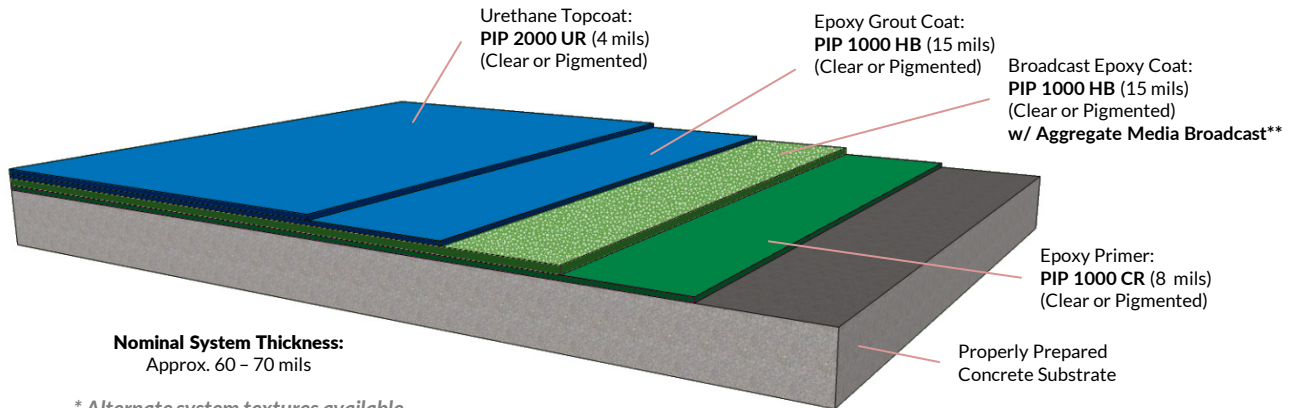

* Alternate system textures available

** Broadcast media will add to system thickness. Broadcast rate depends on media chosen.
Contact your PIP representative for further information.

System Description:

A broadcast floor system consisting of an epoxy primer, followed by a high-build epoxy broadcast with aggregate media. The system is then coated with a high-build epoxy, and top coated with an aliphatic urethane. This low-odor broadcast system can be pigmented in a variety of colors, and features excellent impact and abrasion resistance. Suited for use in general shop areas where durability, aesthetics and cleanability are a requirement.

System Advantages:

- Extremely low odor
- High-build application
- Excellent impact and abrasion resistance
- Resists staining from general cleaning chemicals
- Available in a wide array of colors
- Alternate system textures available (Satin, Gloss, GlossGrip, DiamondWear)

System Installation Overview:

1. Apply PIP 1000 CR epoxy primer to properly prepared substrate and allow to cure
2. Apply PIP 1000 HB body coat, broadcast with aggregate media and allow to cure
3. Apply PIP 1000 HB epoxy and allow to cure
4. Apply PIP 2000 UR urethane topcoat and allow to cure

